General Description

The silicon carbide power MOSFET utilizes Oriental-Semi's advanced technology to achieve low on-resistance, low gate charge, low Qrr and excellent thermal performance by exploiting innovative properties of wide bandgap materials. It is engineered to minimize conduction loss and provide superior switching performance almost independent of temperature.

The silicon carbide power MOSFET provides high reliability and extremely high efficiency. It is targeted to improve application performance in frequency, energy efficiency, reliability, system size and weight reduction.

Features

- High blocking voltage with low on-resistance
- High-speed switching with low capacitances
- IGBT-compatible driving voltage (15V for turn-on)
- Fast intrinsic diode with low reverse recovery (Qrr)
- Temperature independent turn-off switching losses
- Halogen free, RoHS compliant

Applications

- On-board charger/PFC
- EV motor drive
- High voltage DC/DC converters
- Switch mode power supplies

Key Performance Parameters

Parameter	Value	Unit
V_{DS}	650	V
$I_{D,\ pulse}$	135	A
$R_{DS(ON),\ typ}$ @ V_{GS}=18V	45	mΩ
Q_g	46	nC

Marking Information

Product Name	Package	Marking
OSQ65R045HT2F	TO247	OSQ65R045HT2

Package & Pin Information





Absolute Maximum Ratings at T_j=25°C unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	650	V
Gate-source voltage (max static)	V_{GS}	-8/+22	V
Gate-source voltage (recommended operating values)	V_{GS}	-4/+18	V
Continuous drain current[1)], T_C=25 °C	I_D	53	A
Continuous drain current[1)], T_C=100 °C		37	
Pulsed drain current[2)], T_C=25 °C	$I_{D, pulse}$	135	A
Power dissipation[3)], T_C=25 °C	P_D	166	W
Operation and storage temperature	T_{stg}, T_j	-55 to 175	°C

Thermal Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal resistance, junction-case	$R_{\theta JC}$		0.69	0.9	°C/W
Thermal resistance, junction-ambient	$R_{\theta JA}$			62	°C/W

Electrical Characteristics at T_j=25°C unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Drain-source breakdown voltage	BV_{DSS}	650			V	V_{GS}=0 V, I_D=100 μA
Gate threshold voltage	$V_{GS(th)}$	2.0	2.7	3.6	V	V_{DS}=V_{GS}, I_D=5 mA
Drain-source on-state resistance	$R_{DS(ON)}$		45	60	mΩ	V_{GS}=18 V, I_D=15 A
			60			V_{GS}=18 V, I_D=15 A, T_j=175 °C
			60	79	mΩ	V_{GS}=15 V, I_D=15 A
			70			V_{GS}=15 V, I_D=15 A, T_j=175 °C
Transconductance	g_{fs}		9		S	V_{DS} = 20 V, I_D =15 A
Gate-source leakage current	I_{GSS}			±100	nA	V_{GS}=-8~22 V
Drain-source leakage current	I_{DSS}			100	μA	V_{DS}=650 V, V_{GS}=0 V
				500	μA	V_{DS}=650 V, V_{GS}=0 V, T_j=175 °C
Gate resistance	R_G		2.3		Ω	f=1 MHz, Open drain, V_{AC}=25 mV

Oriental Semiconductor © Copyright Reserved V1.2

Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Input capacitance	C_{iss}		1200		pF	V_{GS}=0 V, V_{DS}=400 V, f=1 MHz, V_{AC}=25 mV
Output capacitance	C_{oss}		113		pF	
Reverse transfer capacitance	C_{rss}		4.3		pF	
C_{oss} stored energy	E_{OSS}		10.6		μJ	
Turn-on delay time	$t_{d(on)}$		9.2		ns	V_{GS}=-4/18 V, V_{DS}=400 V, R_G=5 Ω, I_D=15 A, L=120 μH, T_j=25 °C
Rise time	t_r		16.7		ns	
Turn-off delay time	$t_{d(off)}$		18.7		ns	
Fall time	t_f		8.4		ns	
Turn-on switching energy	E_{on}		69		μJ	
Turn-off switching energy	E_{off}		13.6		μJ	
Turn-on switching energy	E_{on}		62		μJ	V_{GS}=-4/18 V, V_{DS}=400 V, R_G=5 Ω, I_D=15 A, L=120 μH, T_j=175 °C
Turn-off switching energy	E_{off}		14		μJ	

Gate Charge Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Total gate charge	Q_g		46		nC	V_{GS}=-4/18 V, V_{DS}=400 V, I_D=15 A
Gate-source charge	Q_{gs}		15.4		nC	
Gate-drain charge	Q_{gd}		9.5		nC	

Oriental Semiconductor © Copyright Reserved V1.2

Body Diode Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Diode forward voltage	V_{SD}		4.4		V	I_S=15 A, V_{GS}=-4 V, T_j=25 °C
			3.9		V	I_S=15 A, V_{GS}=-4 V, T_j=175 °C
Continuous diode forward current	Is		53		A	V_{GS}=-4 V, T_j=25 °C
Reverse recovery time	t_{rr}		12		ns	V_{GS}=-4 V, V_R=400 V, I_S=15 A, di/dt=3000 A/μs, T_j=25 °C
Reverse recovery charge	Q_{rr}		97		nC	
Peak reverse recovery current	I_{rrm}		13.5		A	
Reverse recovery time	t_{rr}		29.2		ns	V_{GS}=-4 V, V_R=400 V, I_S=15 A, di/dt=1000 A/μs, T_j=175 °C
Reverse recovery charge	Q_{rr}		151		nC	
Peak reverse recovery current	I_{rrm}		9.5		A	

Note

1) Calculated continuous current based on maximum allowable junction temperature.
2) Repetitive rating; pulse width limited by max. junction temperature.
3) Pd is based on max. junction temperature, using junction-case thermal resistance.

Oriental Semiconductor © Copyright Reserved V1.2

Electrical Characteristics Diagrams

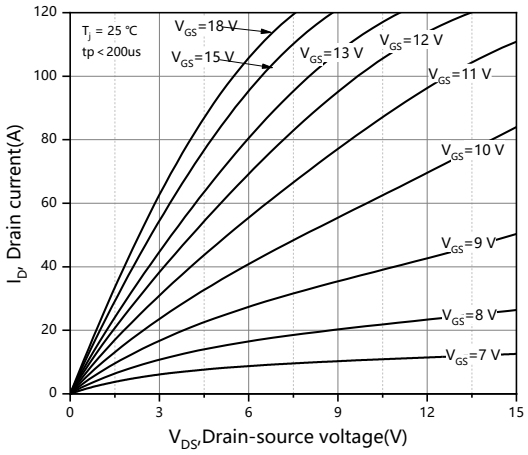

Figure 1.Output characteristics T_j=25℃

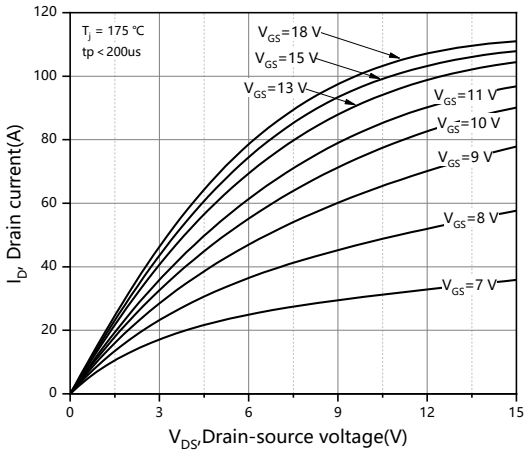

Figure 2.Output characteristics T_j=175℃

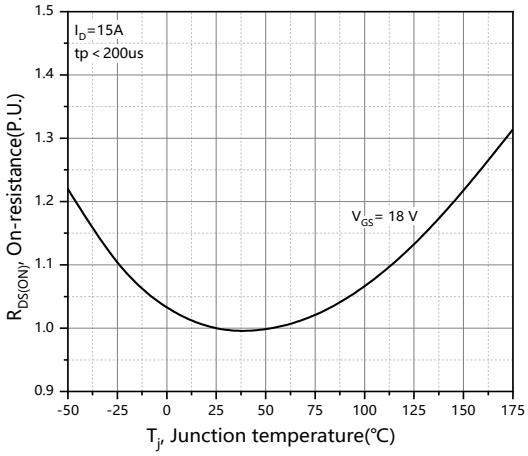

Figure 3. Normalized on-resistance vs. temperature

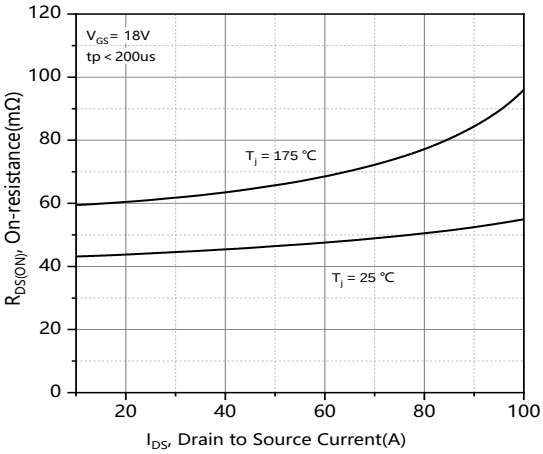

Figure 4. On-resistance vs. drain current for various temperatures

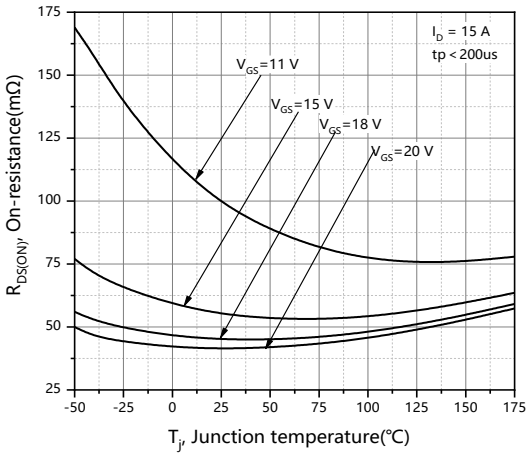

Figure 5. On-resistance vs. temperature for various gate voltage

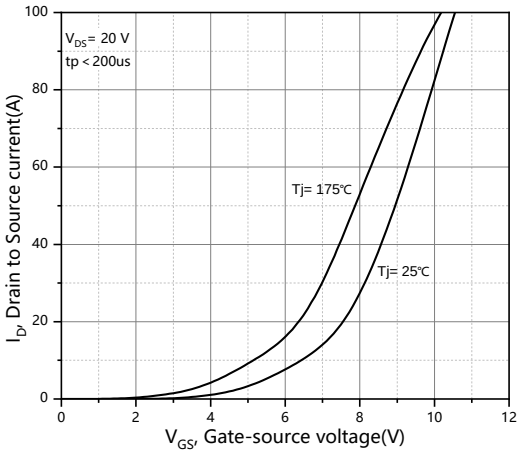

Figure 6. Transfer characteristic for various junction temperatures

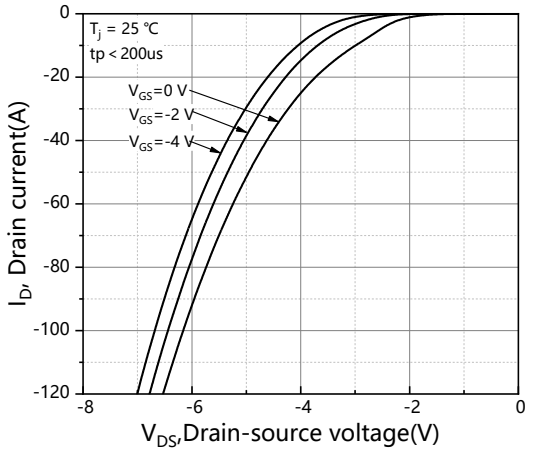

Figure 7. Body diode characteristic at T_j = 25 ºC

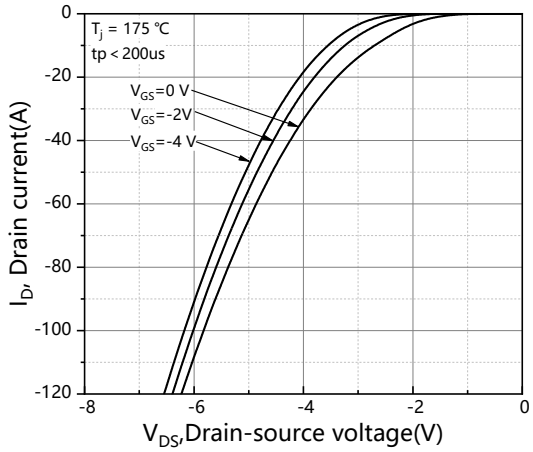

Figure 8. Body diode characteristic at T_j = 175ºC

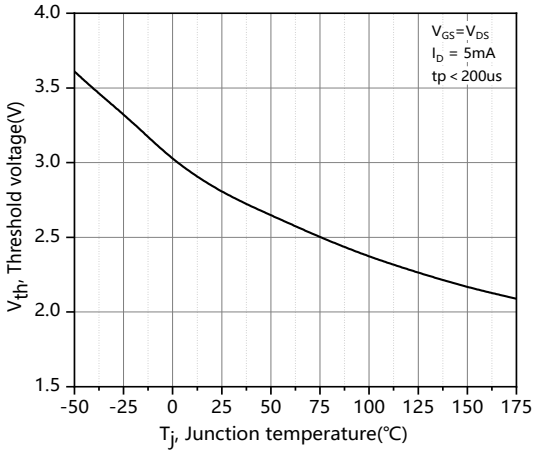

Figure 9. Threshold voltage vs. temperature

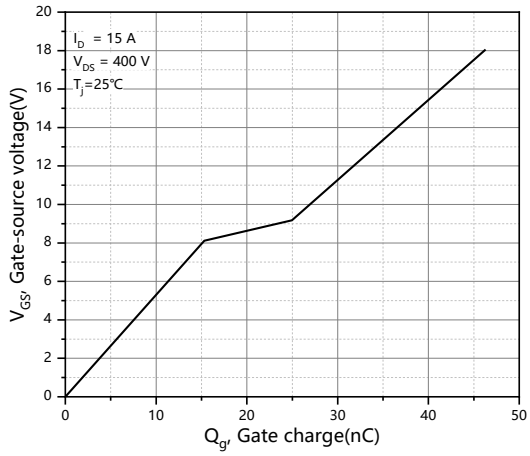

Figure 10. Gate charge characteristic

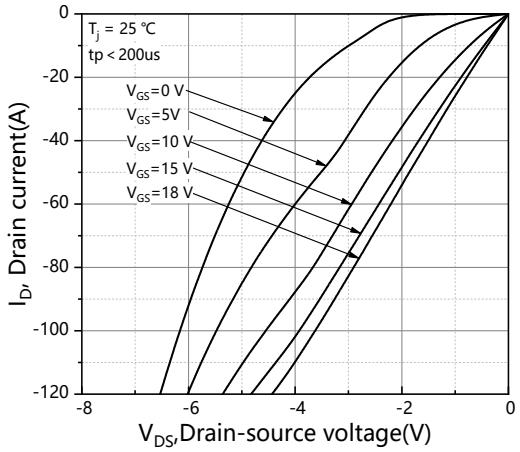

Figure 11. 3rd quadrant characteristic at T_j = 25 ºC

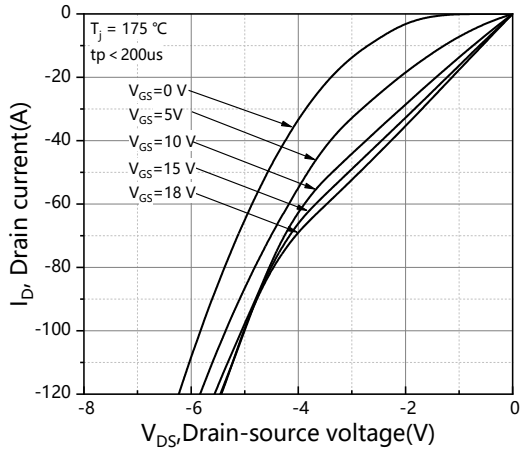

Figure 12. 3rd quadrant characteristic at T_j = 175 ºC

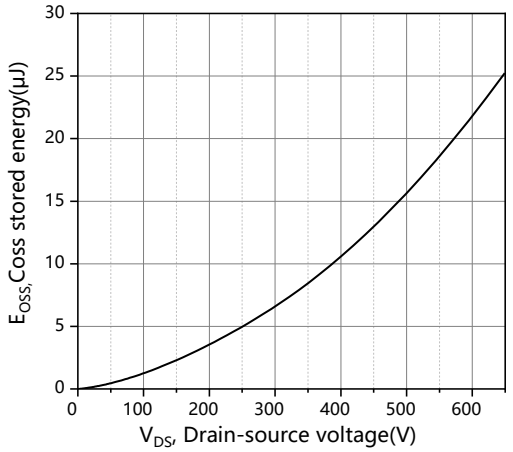

Figure 13. Output capacitor stored energy

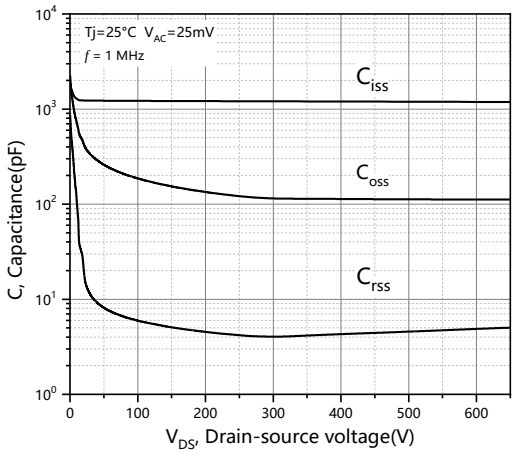

Figure 14. Capacitances vs. drain-source voltage

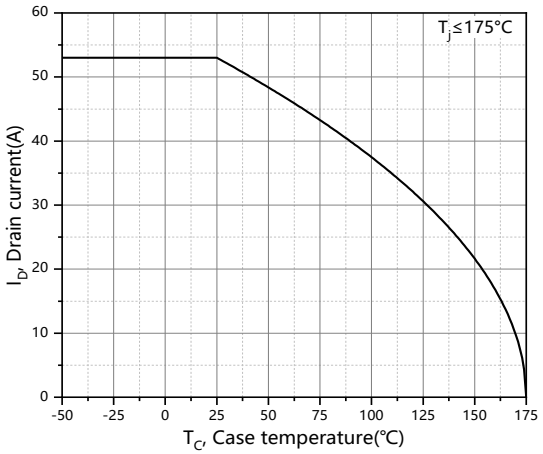

Figure 15. Continuous drain current derating vs.case temperature

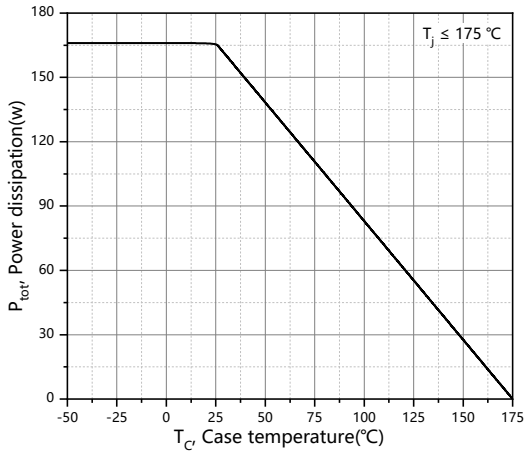

Figure 16. Maximum power dissipation derating vs.case temperature

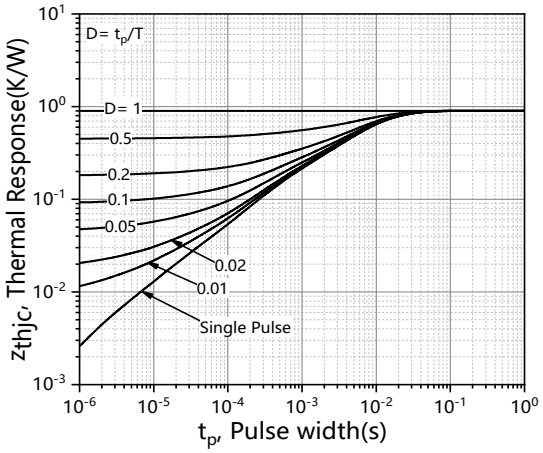

Figure 17. Transient thermal impedance (junction - case)

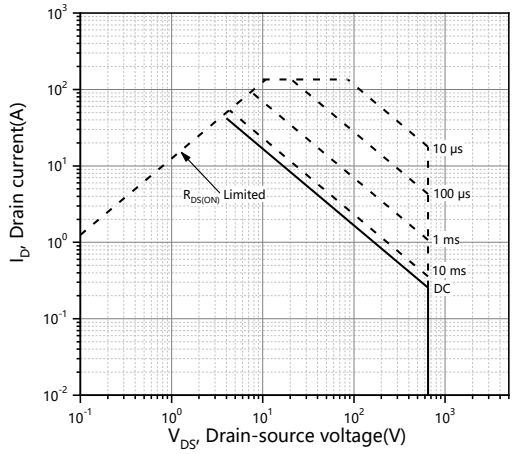

Figure 18. Safe operating area

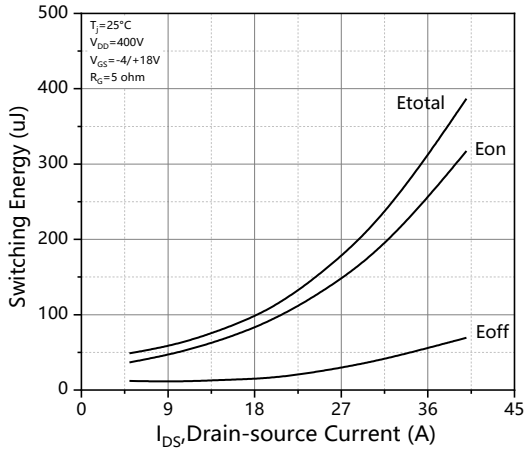

Figure 19. Clamped Inductive switching energy vs.drain current

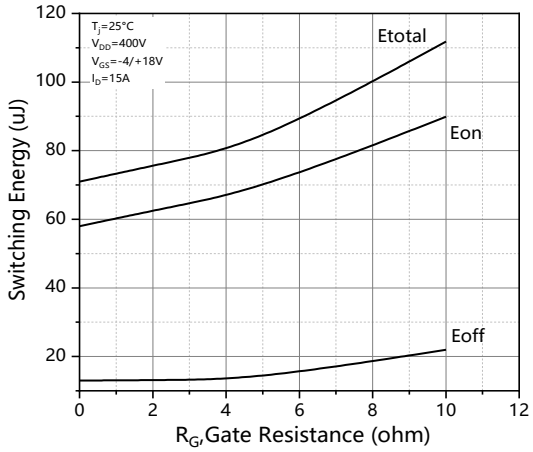

Figure 20. Clamped inductive switching energy vs. R_G

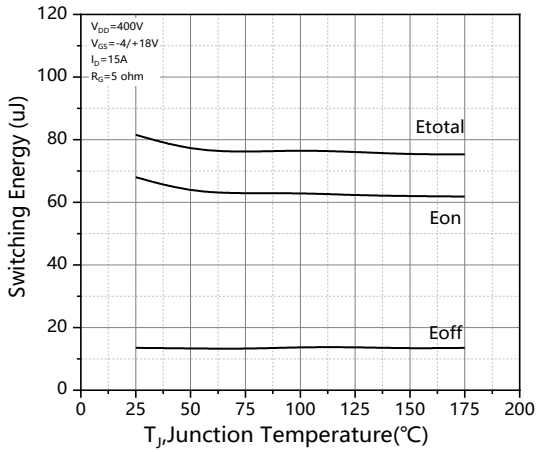

Figure 21. Clamped inductive switching energy vs. temperature

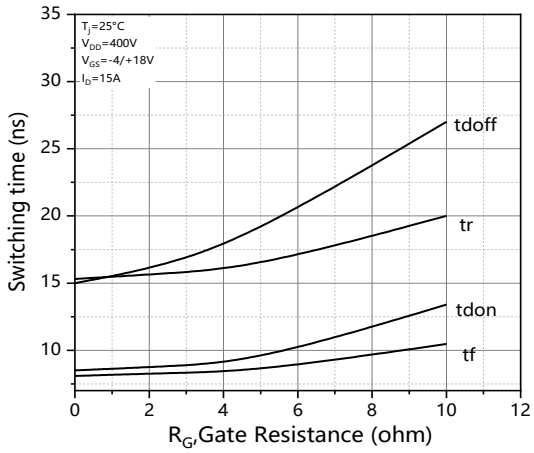

Figure 22. Switching times vs. R_G

Package Information

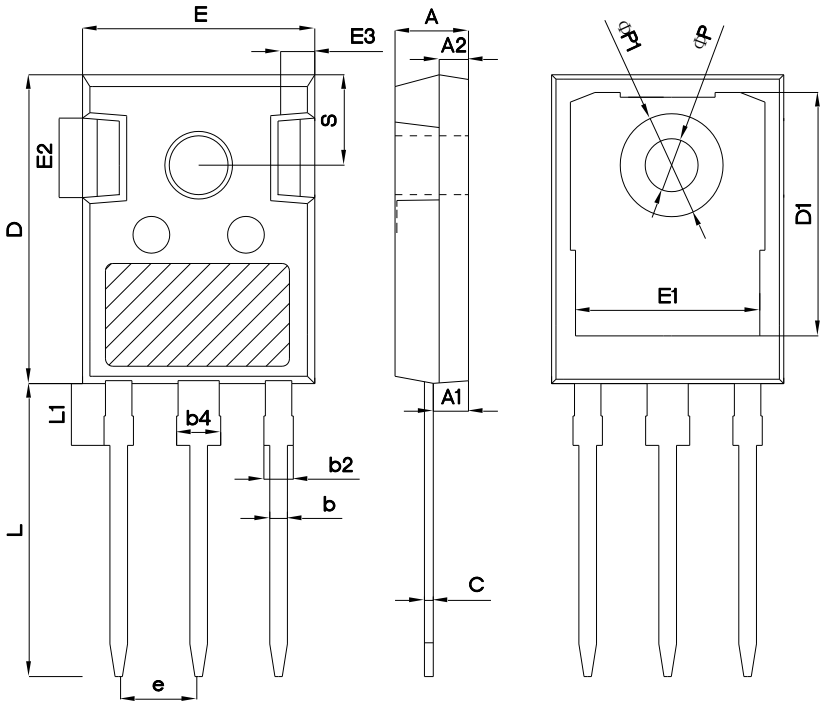

Symbol	mm		
	Min	Nom	Max
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	1.21	1.36
b2	1.91	2.01	2.21
b4	2.91	3.01	3.21
c	0.51	0.61	0.75
D	20.80	21.00	21.30
D1	16.25	16.55	16.85
E	15.50	15.80	16.10
E1	13.00	13.30	13.60
E2	4.80	5.00	5.20
E3	2.30	2.50	2.70
e	5.44 BSC		
L	19.82	19.92	20.22
L1	-	-	4.30
ΦP	3.40	3.60	3.80
ΦP1	-	-	7.30
S	6.15 BSC		

Version : TO247-P -package outline dimension

Ordering Information

Package Type	Units/ Tube	Tubes/ Inner Box	Units/ Inner Box	Inner Boxes/ Carton Box	Units/ Carton Box
TO247-P	30	11	330	6	1980

Product Information

Product	Package	Pb Free	RoHS	Halogen Free
OSQ65R045HT2F	TO247	yes	yes	yes

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives (www.orientalsemi.com).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved

Revision History

Version	Revision History	Date
V1.0	Initial release	2025-03-06
V1.1	Update body diode characteristic	2025-10-09
V1.2	Update Absolute Maximum Ratings	2025-11-26

ORIENTAL SEMICONDUCTOR

A Power Semiconductor Innovator